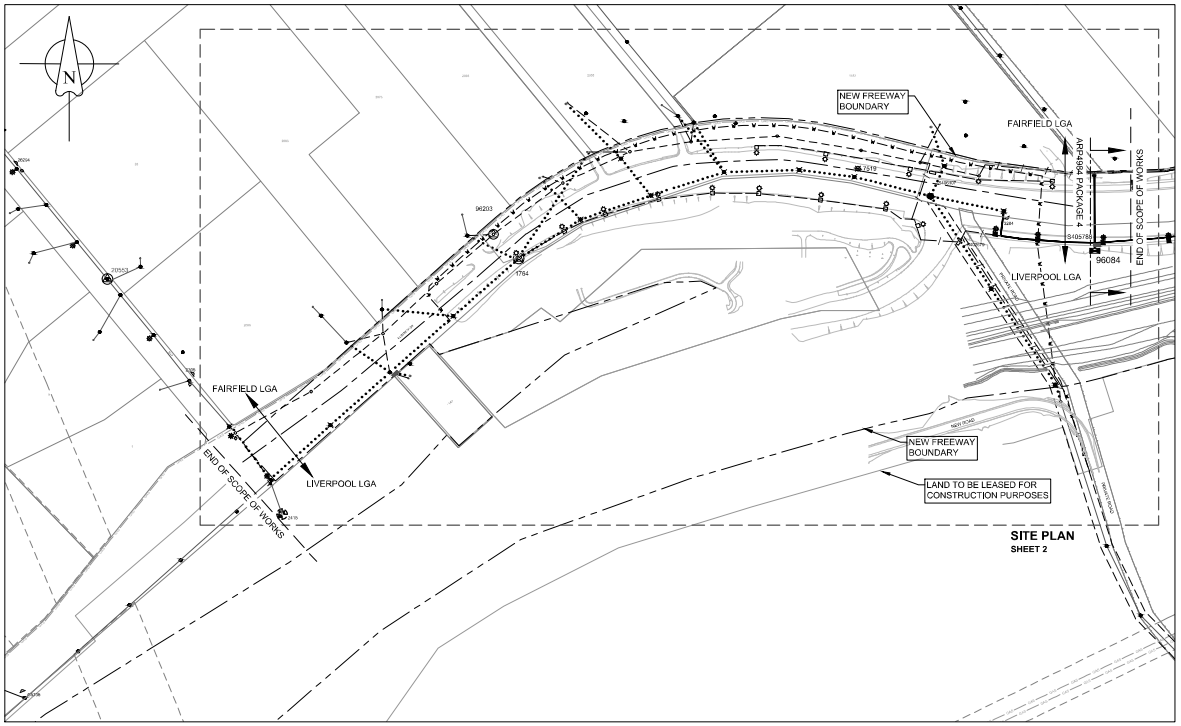

SITE PLAN
SHEET 2

LOCATION PLAN

0 40 80 120 160 200m
40302010
SCALE 1:2000 @ A1

HV TRENCH LENGTH	: 395m
LV TRENCH LENGTH	: 591m
TOTAL TRENCH LENGTH: 986m	

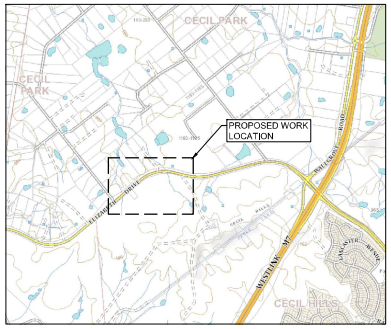

LOCATION MAP
(NTS)

CAUTION :

HIGH PRESSURE GAS MAINS IN VICINITY OF PROPOSED WORK AREA. PRIOR TO ANY EXCAVATION IN THIS AREA MUST CONTACT TO HIGH PRESSURE RESPONSE COORDINATOR ON **1300 665 380**

PIONEER COST SHARE REIMBURSEMENT SCHEME
Pre-Calculated Reimbursement for Customers Load up to 50kVA

Asset	Asset Cost Estimate ($)	Unit Quantity	Prospective New Customer Numbers	Maximum Reimbursement per New Customer Connected ($)	Maximum Reimbursement Amount ($)
HV Mains					N/A
LV Mains					N/A
Substation					N/A

KEY DOCUMENTS TABLE
THE CERTIFICATION OF THIS PROJECT IS SUPPORTED BY THE FOLLOWING KEY DOCUMENTS

DOCUMENT NAME	NOTATION DATE
SUMMARY ENVIRONMENTAL REPORT (SER)	15/12/2023
AGREEMENT FOR ENTRY, GRANT and CREATION OF EASEMENT - FPJ5013	N/A
EQUIPMENT TO BE RETURNED TO ENDEAVOUR ENERGY - FPJ4252	15/12/2023
EQUIPMENT TO BE RETURNED TO ENDEAVOUR ENERGY - FPJ4253	N/A
TELECOMMUNICATION ASSET AGREEMENT - FPJ4184	28/03/2023
DESIGNER'S SAFETY REPORT	15/12/2023
LIST ANY KEY DOCUMENTS SUPPORTING THE CERTIFICATION:	
1. M12 EIS APPENDIX I ABORIGINAL CULTURAL HERITAGE ASSESSMENT REPORT	October 2019
2. APPROVED DISPENSATION FORM 8048 FOR INSTALLING 17M POLE	7/07/2023
3. TINSW SKETCH SR 5334 FILE NO. : SF2019/158153	20/11/2020
4. TINSW LETTER FOR CONFIRMATION OF ACCESS TO EE ASSETS	12/02/2024

NOTE:
- THIS PROJECT ASSUMES COMPLETION OF ARP4984.
- ASP LEVEL 2 WORK WILL BE CARRIED AS PER NSW INSTALLATION RULE AND SHOWN FOR INFORMATION ONLY AND NOT PART OF THIS CERTIFICATION
- ASP LEVEL 1 / CONTRACTOR TO MAINTAIN MINIMUM EXISTING STREET LIGHT LUX LEVEL DURING CONSTRUCTION
- AN ABORIGINAL HERITAGE IMPACT PERMIT (AHIP) HAS BEEN OBTAINED BY THE DEVELOPER OF THE ROAD (AHIP). THE ASP LEVEL 1 HAS THE RESPONSIBILITY OF LIAISING WITH THE DEVELOPER TO ENSURE THAT THE CONDITIONS OF THE AHIP ARE ADHERED TO AT ALL TIMES.

THIS DRAWING SUPPLIES PROPOSED M12 ROAD UPGRADE

C.A.P. NO	FILE NO	LOT NO	NO OF LOT	DEVELOPER	DEVELOPERS REP	PHONE NO
ARP4983		N/A	N/A	TINSW	JAMES JOHN	M : 0438626359

NOTE:
- THIS PROJECT ASSUMES THE COMPLETION OF ARP4984.

ATTENTION
ALL SERVICES SEARCHES MUST BE CHECKED BEFORE CONSTRUCTION.

BEFORE YOU DIG
www.byda.com.au

COMMUNICATION ASSETS ALTERATION/RELOCATION

Telecommunication Assets are / ~~are not~~ affected by this project.
The construction ASP must coordinate the work with the following Telecommunication Companies:

Comms Co.	Contact Name	Phone No.	Initial Contact Date	Arrangement Details and Date Agreed
NBN	Kenny D'Cruz	289188319	'23-Dec-2022	60 working days notice / 28/03/2023

Technical drawings of the arrangements are available from the Design ASP.

CERTIFIED BY ENDEAVOUR ENERGY
Amendment: D
Date Approved: 12-11-2024
Examiner's Signature: Ali Siddiqui
Print Name: Ali Siddiqui
This Certification is issued subject to Endeavour Energy's Standard Certification Terms

AUTHORISATION OF ESTIMATE VALUE OF ENDEAVOUR ENERGY FUNDED ASSETS FOR ARP4983
Signed: Ali Siddiqui
Print Name: Ali Siddiqui
Service Number: 39231
Funding Amount: $6,225
Date: 12-11-2024

NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH RELEVANT ENDEAVOUR ENERGY'S STANDARDS AND THE NETWORK CONNECTION POLICY.
2. ENDEAVOUR ENERGY CONTACT PHONE: 131081
3. CERTIFICATION SHALL LAPSE WHERE:
(i) NOTICE OF INTENT HAS NOT BEEN RECEIVED WITHIN SIX (6) MONTHS OF THIS CERTIFICATION, OR
(ii) CONSTRUCTION HAS BEEN INTERRUPTED FOR MORE THAN SIX (6) MONTHS.
WHERE DESIGN CERTIFICATION HAS LAPSED THE DESIGN MUST BE RESUBMITTED FOR CERTIFICATION BY THE ACCREDITED DESIGNER.
4. ATTENTION:
PERMANENT SURVEY MARKS MAY EXIST IN THIS AREA. THESE ARE TO BE LOCATED BY A SURVEYOR PRIOR TO COMMENCEMENT OF WORK.
5. ATTENTION:
ALL SERVICES SEARCHES MUST BE CHECKED BEFORE CONSTRUCTION.
6. WARNING
LIVE ENDEAVOUR ENERGY CABLES & OTHER SERVICES IN THIS AREA. PLEASE CONTACT DIAL BEFORE YOU DIG ON TELEPHONE: 1100 FOR SEARCHES TWO DAYS PRIOR TO EXCAVATION.
7. ATTENTION:
SERVICE PROVIDER TO NOTIFY ENDEAVOUR ENERGY'S ASSET DATA CUSTOMER DEPT. DAILY WHEN CABLE WORKS IS IN PROGRESS. TELEPHONE 131081.
8. OPERATION LIMITATIONS
UNLESS APPROVED OTHERWISE, INTERRUPTION TO ANY CUSTOMER'S SUPPLY MUST BE AVOIDED. THE FOLLOWING ALTERNATIVES SHOULD BE CONSIDERED:
-MOBILE GENERATORS & SUBSTATIONS
-LIVE LINE WORK
-DESIGN ALTERNATIVES
-LOW VOLTAGE PARALLELS
-WORK PRACTICES/STANDARDS
THE COST IS TO BE FUNDED BY THE CUSTOMER/DEVELOPER
9. REIMBURSEMENTS WILL BE PAID TO THE NOMINATED PARTY ON THE LETTER OF INTENT AFTER THE WORKS HAVE BEEN COMPETED AND THE LETTER OF ACCEPTANCE HAS BEEN ISSUED. THE REIMBURSED AMOUNT IS SHOWN IN THE FUNDING ARRANGEMENTS FOR SCOPE OF WORK. ANY DISAGREEMENT WITH THE AMOUNT SHOULD BE RESOLVED WITH ENDEAVOUR ENERGY PRIOR TO THE COMMENCEMENT OF WORKS.
10. AN EARTH CONNECTION WARNING LABEL MUST BE INSTALLED WHERE EARTH CONDUCTOR OR AN EXTENDED EARTH GRID IS TO BE CONNECTED TO LV STREET NEUTRAL TO ACHIEVE AN MEN SYSTEM AS PER EDI 0006. REFER TO DRAWING No.348245.
11. HAVE ALL THE EXISTING ASSETS BEEN FIELD CHECKED AND ARE ACCURATE AT THE TIME OF DESIGN? YES / ~~NO~~
12. QUANTITIES AND DIMENSIONS GIVEN ON THIS DRAWING ARE BASED ON DESIGN INFORMATION AND SITE CONDITIONS AT THE TIME OF DESIGN. AS THEY MIGHT CHANGE, THE BUILDER OF THIS PROJECT MUST CHECK ALL QUANTITIES AND DIMENSION ON SITE PRIOR TO TENDERING AND PRIOR TO CONSTRUCTION.
13. ENVIRONMENTAL MANAGEMENT STANDARD EMS001 IS PART OF THE DESIGN.

FUNDING ARRANGEMENTS FOR SCOPE OF WORKS

ASP LEVEL 1 ELECTRICAL WORKS			CUSTOMER
ENDEAVOUR ENERGY SUPPLIED MATERIALS		CUSTOMER FUNDED NON-CONTESTABLE WORKS	CUSTOMER FUNDED
- Nil		• Network switching, substation commissioning, contract inspection and ancillary fees.	Includes but not limited to: • Pegging of property boundaries & infrastructure locations • Providing site access • Own service & service connection • Confirm finished ground levels
ENDEAVOUR ENERGY FUNDED & CONSTRUCTED			EXISTING DUCT USAGE CHARGES (exc GST)
Works Required Prior to Completion of Customer Contestable Project	Works Required in Association of Customer Contestable Project		Nil
- Nil	- Nil		CO-ORDINATION SUPPLY REQUIRED DATE (TO BE COMPLETED BY THE CUSTOMER)
ENDEAVOUR ENERGY FUNDED & ASP L1 CONSTRUCTED – REIMBURSEMENT (exc GST)		CUSTOMER FUNDED CONTESTABLE WORKS	Third Quarter of 2023
Pole Sub - 200kVA Pole Transformer $5,675 Total EE Capital Contribution (excluding PM & Design) $5,675 EE Capital Contribution (HV reimbursed) $6,225		All other works and materials including but not limited to: • Trenching • Underbores • Duct Installation • Cable laying and/or installations	ASSET TO BE RETURNED TO NEAREST ENDEAVOUR ENERGY DEPOT BY L1 ASP • 1 x 19kV 100kVA Pole Top TF • HD CU 70/35 LV CABLE (ARP0024_3689m) ALL REMOVED COPPER CONDUCTORS ARE TO BE RETURNED TO EE DEPOT.

DESIGN COMPLIANCE AND INDEMNITY

This design complies with Endeavour Energy's relevant standards as current at this time and as listed on the Endeavour Energy Accredited Service Provider"s Internet site. These standards include, but are not limited to:

CP: Connection Policy
EMS: Environmental Management Standard
MC1: Mains Construction Instruction
MD1: Mains Design Instruction
PD1: Protection Design Instruction
SD1: Substation Design Instruction
SAO.0001: Design Drawing Standard
MM1: Mains Maintenance Instruction
SM1: Substation Maintenance Instruction
LDI 0001: Public Lighting Electrical Design Element

Additionally, where relevant, the design complies with AS/NZS 7000 "Overhead Line Design - Detailed Procedures" published by The Australian Standards.

WSP Australia Pty Ltd indemnifies Endeavour Energy for any loss or damage resulting from non-compliance of the design with the above standards.

Signed: ?
Name: Darshan Shrestha
Service Provider Number: 5045 Date: 6/09/2024

WORKS COMPLETED/FIELD BOOK
CONSTRUCTED BY:
WORKS COMPLETED:
SIGNATURE: DATE:
INSPECTED BY:
SIGNATURE: DATE:

ASSET RECORDING
I:
OF:
CONTACT No.:
HEREBY CERTIFY THAT ASSETS MARKED AS-BUILT ON THIS DRAWING HAVE BEEN RECORDED AS PER ENDEAVOUR ENERGY STANDARD SAD 0004.
SIGNATURE:
DATE:

Cadastre: © Land and Property Information 2016

AMENDMENTS			
ORIGINAL ISSUE			
A	DRAFT No. 05	B. Ng	11/03/2024
	DRAWN	D. S.	
	MOVE POLE / PILLAR LOCATION AND ADD ARP4984		
	CHKD	P. P.	8/04/2024
	DRAWN	D. S.	
	UPDATE POLE SUB AT FIELD & REVISE EARTHING REF 61		
	CHKD	P. P.	

CLIENT: JOHN HOLLAND M7→M12 Integration Project; NSW GOVERNMENT; Transport for NSW

wsp
Level 27, Ernst & Young Centre
680 George Street
Sydney NSW 2000
GPO BOX 5394
Sydney NSW 2001 Australia
Telephone +61 2 9272 5100
Facsimile +61 2 9272 5101
Email sydney@wsp.com
ASP REF/ACCREDITATION NO. - 5045

TEMPLATE VERSION No.5.20

© THIS DRAWING AND THE COPYRIGHT THEREIN IS THE PROPERTY OF ENDEAVOUR ENERGY AND MAY NOT BE COPIED, REPRODUCED, DISTRIBUTED, LOANED OR DISCLOSED WITHOUT WRITTEN CONSENT OF ENDEAVOUR ENERGY

REFERENCE DRAWING'S	
ULL1937	CONNECTION OF LOAD

WORK ORDERS	
GENERAL	
OVERHEAD	
UNDERGROUND	
SUBSTATIONS	

CAMS File No.	ARP4983
AM PROJ. No.	
HV SWITCHING	3284
EE DEPOT	HOXTON PARK
EE REGION	CENTRAL
HV OP DIAG	KEMPS CREEK 1 D11
LOCAL GOV AREA	LIVERPOOL

ORIGINAL SCALE

DRAWN	DARSHAN S
DATE	17/07/2023
CHD	PRAMOD P

DO NOT SCALE
DIMENSIONS IN METRES
GDA94/MGA56 COORDINATE SYSTEM
DESIGN DARSHAN S

ELIZABETH DRIVE
CECIL PARK
ARP4983
ASSET RELOCATION
M12 EAST - ELIZABETH DRIVE CONNECTION

Endeavour Energy

A1 526458 D

SHEET No 1 OF 9 SHEETS

92119

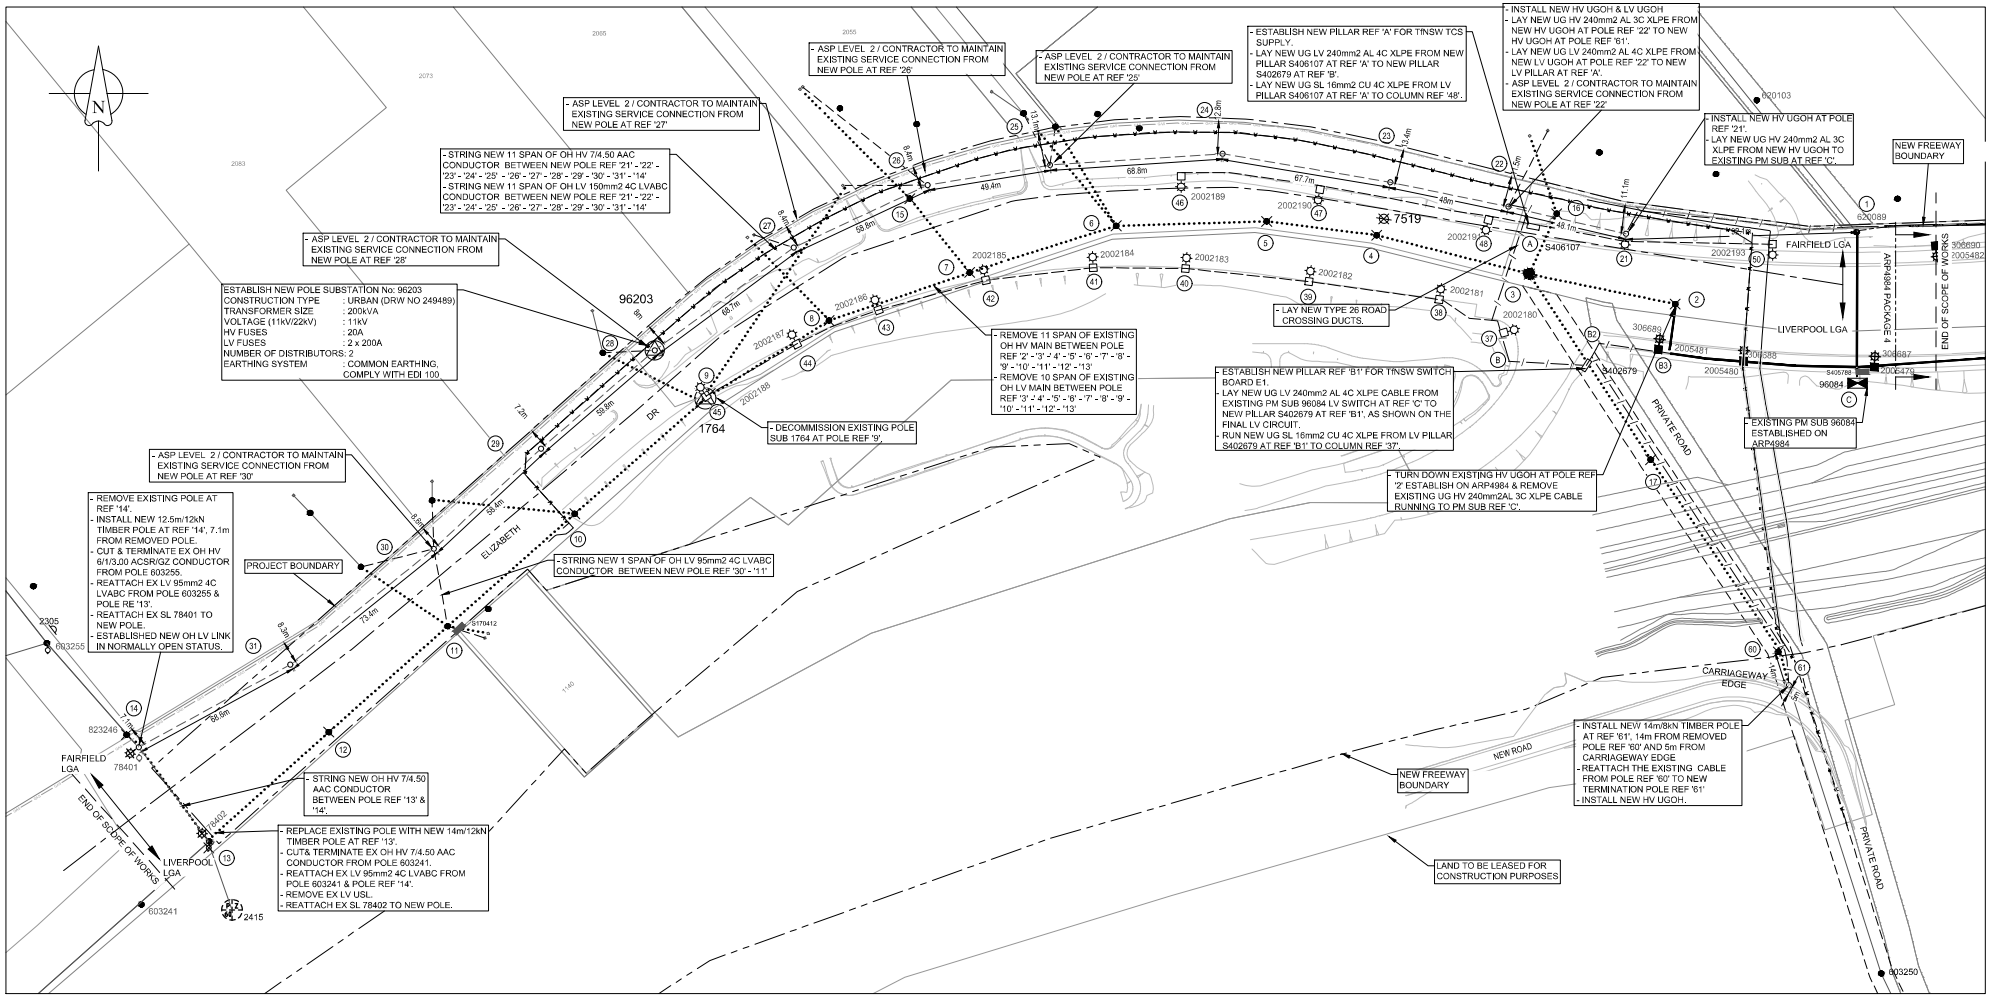

SITE PLAN LEGEND

- NEW LV TRENCH
- STRING NEW OH CABLE
- EXISTING UNDERGROUND MAINS
- EXISTING OH CABLE
- REMOVE CONDUCTOR
- EXISTING DUCTS
- LGA DEMARCATION
- EXISTING LANTERN
- REMOVE LANTERN
- NEW LANTERN
- EXISTING POLE
- REMOVE POLE
- EXISTING COLUMN
- NEW COLUMN
- EXISTING PILLAR
- PADMOUNT SUBSTATION
- POLE SUBSTATION
- NEW PILLAR
- LV LINK (N/O)
- NEW POLE
- NEW HV TRENCH
- REPLACE POLE
- HV ABS (N/C)
- HV USL (N/C)
- GAS — HIGH PRESSURE GAS
- WATER MAIN
- NEW FREEWAY BOUNDARY
- EXISTING 9.145m WIDTH ENDEAVOUR ENERGY EASEMENT

SITE PLAN

0 20 40 60 80 100m

201510 5

SCALE 1:1000 @ A1

ASP LEVEL 2 TO RE-ESTABLISH EXISTING SERVICE CONNECTION.

NOTE:
- NEW SL LUMINARIES NUMBER ARE NOT SHOWN ON THE DESIGN FOR CLARITY PURPOSE.

ATTENTION
ALL SERVICES SEARCHES MUST BE CHECKED BEFORE CONSTRUCTION.

BEFORE YOU DIG
www.byda.com.au

CERTIFIED BY ENDEAVOUR ENERGY
Amendment: D
Date Approved: 12-11-2024
Examiner's Signature: Ali Siddiqui
Print Name: Ali Siddiqui
The Certification is issued subject to Endeavour Energy's Standard Certification Terms

WORKS COMPLETED/FIELD BOOK
CONSTRUCTED BY:
WORKS COMPLETED:
SIGNATURE: DATE:
INSPECTED BY:
SIGNATURE: DATE:

ASSET RECORDING
I:
OF:
CONTACT No.:
HEREBY CERTIFY THAT ASSETS MARKED AS BUILT ON THIS DRAWING HAVE BEEN RECORDED AS PER ENDEAVOUR ENERGY STANDARD SAD 0004.
SIGNATURE:
DATE:

Cadastre: © Land and Property Information 2016

AMENDMENTS			
ORIGINAL ISSUE			
A	DRAFT No. 05	11/03/2024	D. S.
B		11/03/2024	D. S.
C	DRAWN		D. S.
	MOVE POLE / PILLAR LOCATION AND ADD ASP LEVEL 2	08/04/2024	P. P.
D	CHKD		P. P.
	REVISE POLE REF '61' & ESTABLISH SLU AT REF '60'	11/11/2024	P. P.
	CHKD		P. P.
	DRAWN		D. S.
	UPDATE POLE SUB AT REF '2' & REVISE EARTHING REF 61		

CLIENT: JOHN HOLLAND M7→M12 Integration Project; NSW GOVERNMENT; Transport for NSW

wsp
Level 27, Ernst & Young Centre
680 George Street
Sydney NSW 2000
GPO BOX 5394
Sydney NSW 2001 Australia
Telephone +61 2 9272 5100
Facsimile +61 2 9272 5101
Email sydney@wsp.com
ASP REF/ACCREDIATION NO. - 5045

TEMPLATE VERSION No.5.20

© THIS DRAWING AND THE COPYRIGHT THEREIN IS THE PROPERTY OF ENDEAVOUR ENERGY AND MAY NOT BE COPIED, REPRODUCED, DISTRIBUTED, LOANED OR DISCLOSED WITHOUT WRITTEN CONSENT OF ENDEAVOUR ENERGY

REFERENCE DRAWING'S	
ULL1937	CONNECTION OF LOAD

WORK ORDERS	
GENERAL	
OVERHEAD	
UNDERGROUND	
SUBSTATIONS	

CAMS File No.	ARP4983
AM PROJ. No.	
HV SWITCHING	3284
EE DEPOT	HOXTON PARK
EE REGION	CENTRAL
HV OP DIAG	KEMPS CREEK 1 D11
LOCAL GOV AREA	LIVERPOOL

ORIGINAL SCALE

DRAWN	DARSHAN S
DATE	17/07/2023
CHD	PRAMOD P

DO NOT SCALE
DIMENSIONS IN METRES
GDA94/MGA56 COORDINATE SYSTEM
DESIGN DARSHAN S

ELIZABETH DRIVE
CECIL PARK
ARP4983
ASSET RELOCATION
M12 EAST - ELIZABETH DRIVE CONNECTION

Endeavour Energy

A1 526458 D

SHEET No 2 OF 9 SHEETS

92119